



## Electric Strikes With Deadbolt Knockouts



*In or Out... we make it Easy!™*

## Instructions

The 0141 is nonhanded, for use on right- or left-hand doors. The standard deadbolt knockouts are used with auxiliary deadbolt options on the mechanical lock. This is primarily for extra security when the electric strike is not being used to open the door electrically.

1. Prepare the door jamb per dimensions.
2. Connect the wires coming from the transformer or power supply to the terminal block on the strike's electrical insert. The connections on the electric strike are not polar sensitive; therefore, "+" or "-" is not observed.
3. Use the deadbolt knockouts according to the door handing and location of the deadbolt.
4. Attach the assembled product using sheet metal or wood screws provided.

**NOTE:** This is a specialty product and does not accommodate all mortise locks with deadbolt options. The maximum latch projection is 3/4" including the 1/8" door and frame clearance.

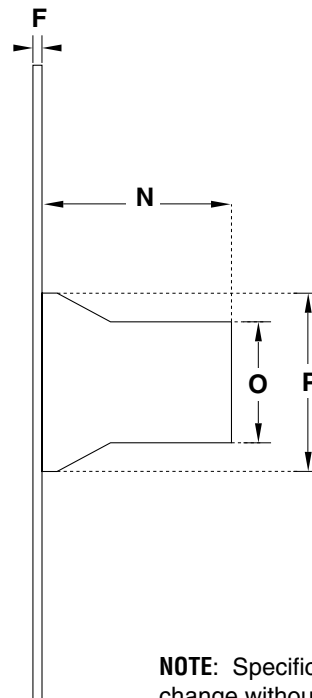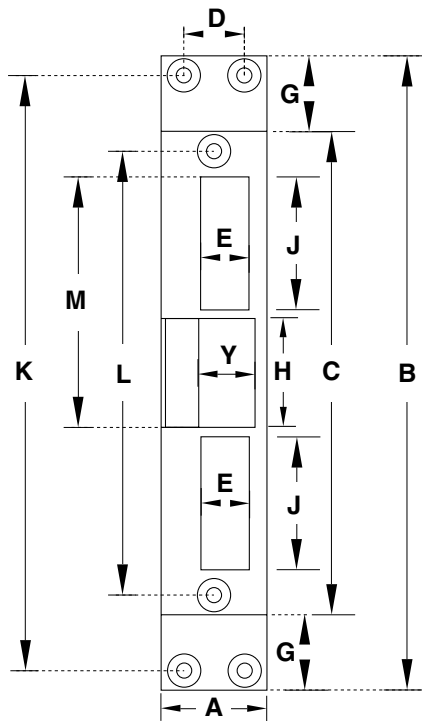

**NOTE:** Specifications are subject to change without notice.

### Profiles for 0141 Electric Strike

Measurement	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Y
Fractional Inches	1-25/64	8-1/4	6-9/32	51/64	39/64	1/8	31/32	1-13/32	1-3/4	7-23/32	5-3/4	3-19/64	2-1/8	2-23/64	25/32
Decimal Inches	1.391	8.250	6.281	.797	.609	.125	.969	1.406	1.750	7.719	5.750	3.297	2.125	2.359	.781
Metric (mm)	45.24	209.55	159.54	20.24	15.48	3.18	24.61	35.72	19.05	196.06	146.05	83.74	53.98	59.93	19.844