



*In or Out...we make it Easy!®*



**904**  
3-1/2" x 4-3/4"  
(88.9 x 120.6mm)



**909S/909F**  
2-3/8" x 2-3/8"  
(60.3 x 60.3mm)



**915**  
6-1/4" x 1-1/2" x 1-1/2"  
(158.8 x 38.1 x 38.1mm)



**917**  
4-1/2" x 2-3/4"  
(114.3 x 69.9mm)

## Features & Benefits

### 904 Emergency Pull Station

- Used for emergency release for electromagnetic locks
- Clear lexan cover lifts easily so paddle can be pulled forward, instantly releasing lock
- Mounts over standard surface or recessed electrical utility boxes (boxes optional)
- Available in blue or yellow
- Available in French or Spanish

### 909 Rocker Switches

- Ideal for desk mount applications
- Surface mount under desk or counter for concealment
- Smooth action rocker with engraved key symbol
- Beige rocker switch available in maintained or momentary action (please specify)
- Flush mount version (909F)

### 915 Passive Infrared (PIR)

- Hands free release for electromagnetic locks
- Ideal for "Request to Exit" with electromagnetic locks
- Adjustable setting for precise detection area desired
- Adjustable relay latch time delay (2-60 sec)
- Two Form C contacts (rated 1A @ 30VDC)
- Available in light grey or black

### 917 Easy Touch Exit Pushbutton

- Virtually infinite lifetime
- Totally weatherproof
- Solid state/no moving parts
- Pressure sensitive
- Fits on a standard single gang box
- No mounting box required
- Works with any system accepting momentary closure
- Architecturally elegant design
- Handicap French or Spanish labels included

## Optional Mounting Accessories

**9SURBOX** .....Surface mount box  
4-3/4"H x 3"W x 2-1/2"D  
(120.6 x 76.2 x 63.5mm)

**9RECBOX** .....Recessed box  
4-1/8"H x 2-1/2"W x 1-3/4"D  
(104.8 x 63.5 x 44.4mm)

## Options

**904**.....French or Spanish screening



*In or Out...we make it Easy!®*


Description	Switch Mode	Switch Configuration	Switch Rating	Standard Finish
904 Pull Station	Maintained Action	DPDT	6A @125VAC	Blue or Yellow
909-MO Rocker Switch	Momentary Action	SPDT N/O or N/C	10A @250V UL/CSA	Beige (plastic)
909-MA Rocker Switch	Maintained Action	SPDT N/O or N/C	10A @250V UL/CSA	Beige (plastic)

Description	Power Consumption	Switch Configuration	Switch Rating	Voltage	Standard Finish
915 PIR	35mA / 38mA @12VDC	DPDT	1A @30VDC	12 or 24VDC	Light Grey or Black

Description	Operating Force	Operating Temperature	Switch Rating	Voltage	Cycle Rating	Closure Duration
917 Exit Button	6 to 12 oz.	-20°F to 180°F	200mA typ. - 400mA max.	up to 40V	20,000,000	250 milliseconds

**NOTE:** Specifications are subject to change without notice. N/C – Normally Closed; N/O – Normally Open. Do not use 917 with RCI's 9325 keypad.

## Side Profiles

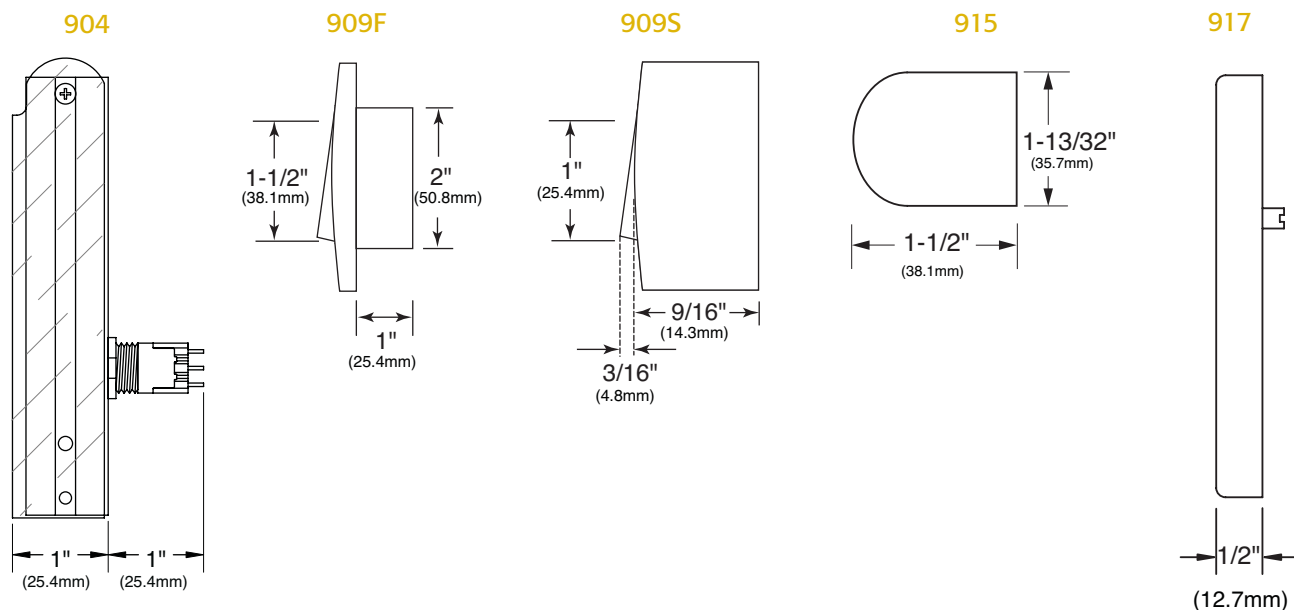

RCI also offers a complete line of Electromagnetic Locks, Electric Locks, Electric Strikes, Power Supplies, Keypads & Readers, Exit Devices, Systems & Door Hardware