

## Notes:

- 1. Do not scale drawing. All dimensions given in inches (mm).
- For strike preparation refer to:
  371 Strike Template No. 7102-0005
  497 Strike Template No. 7102-0003
- 3. Backset: 2-3/4" (70mm) standard
- 4. For wood door preparation refer to Template No. 80-8150-0034-010
- Door manufacturer must provide supports within the door to keep the door from collapsing when lock is installed. Back of latch case must also be supported.

	nexTouch® Cylindrical Locks					
	NTB610	Cylinder Override - Push Button				
	Cylinder Override - Cap Touch					
	NTB630	No Cylinder Override - Push Button				
Г	NTB640	No Cylinder Override - Cap Touch				

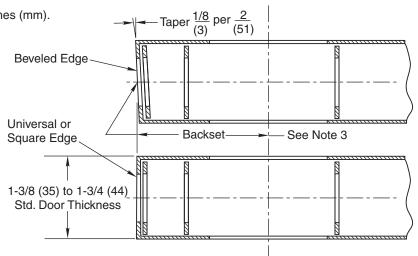

nexTouch® Cylindrical Lock Latch Options							
Latch No.	Front	Backset	Latchbolt Throw	Front Dim. A			
694 (std)	Beveled	2-3/4" (70)	1/2" (13)	1-1/8" (29)			
F694	Flat	2-3/4" (70)	1/2" (13)	1-1/8" (29)			
480B	Beveled	2-3/4" (70)	3/4" (19)	1-1/8" (29)			
F480B	Flat	2-3/4" (70)	3/4" (19)	1-1/8" (29)			

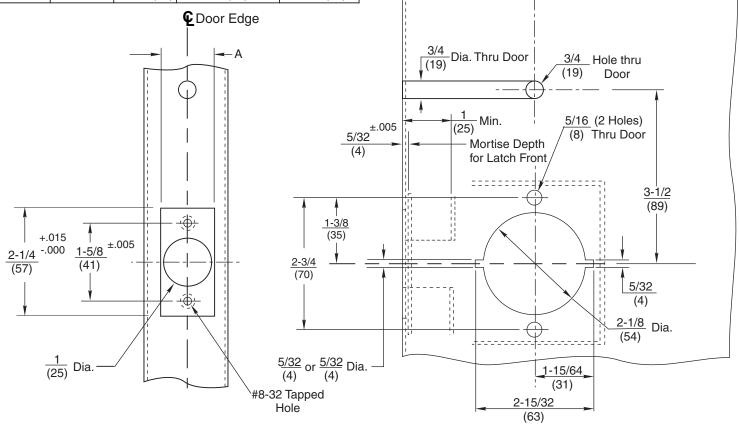

nexTouch® Cylindrical Locks H.M. Door Preparation 2-3/4" (70mm) Backsets **Yale**°

C 2-1/8 Cross Bore

**1-800-438-1951** www.yalelocks.com

TEMPLATE NUMBER

DATE

80-8150-0033-010 10-15