



47KE, 47KN, 47KP, 47KD KEY IN LEVER TRIM TEMPLATE FOR USE WITH 4700 SERIES EXIT DEVICES

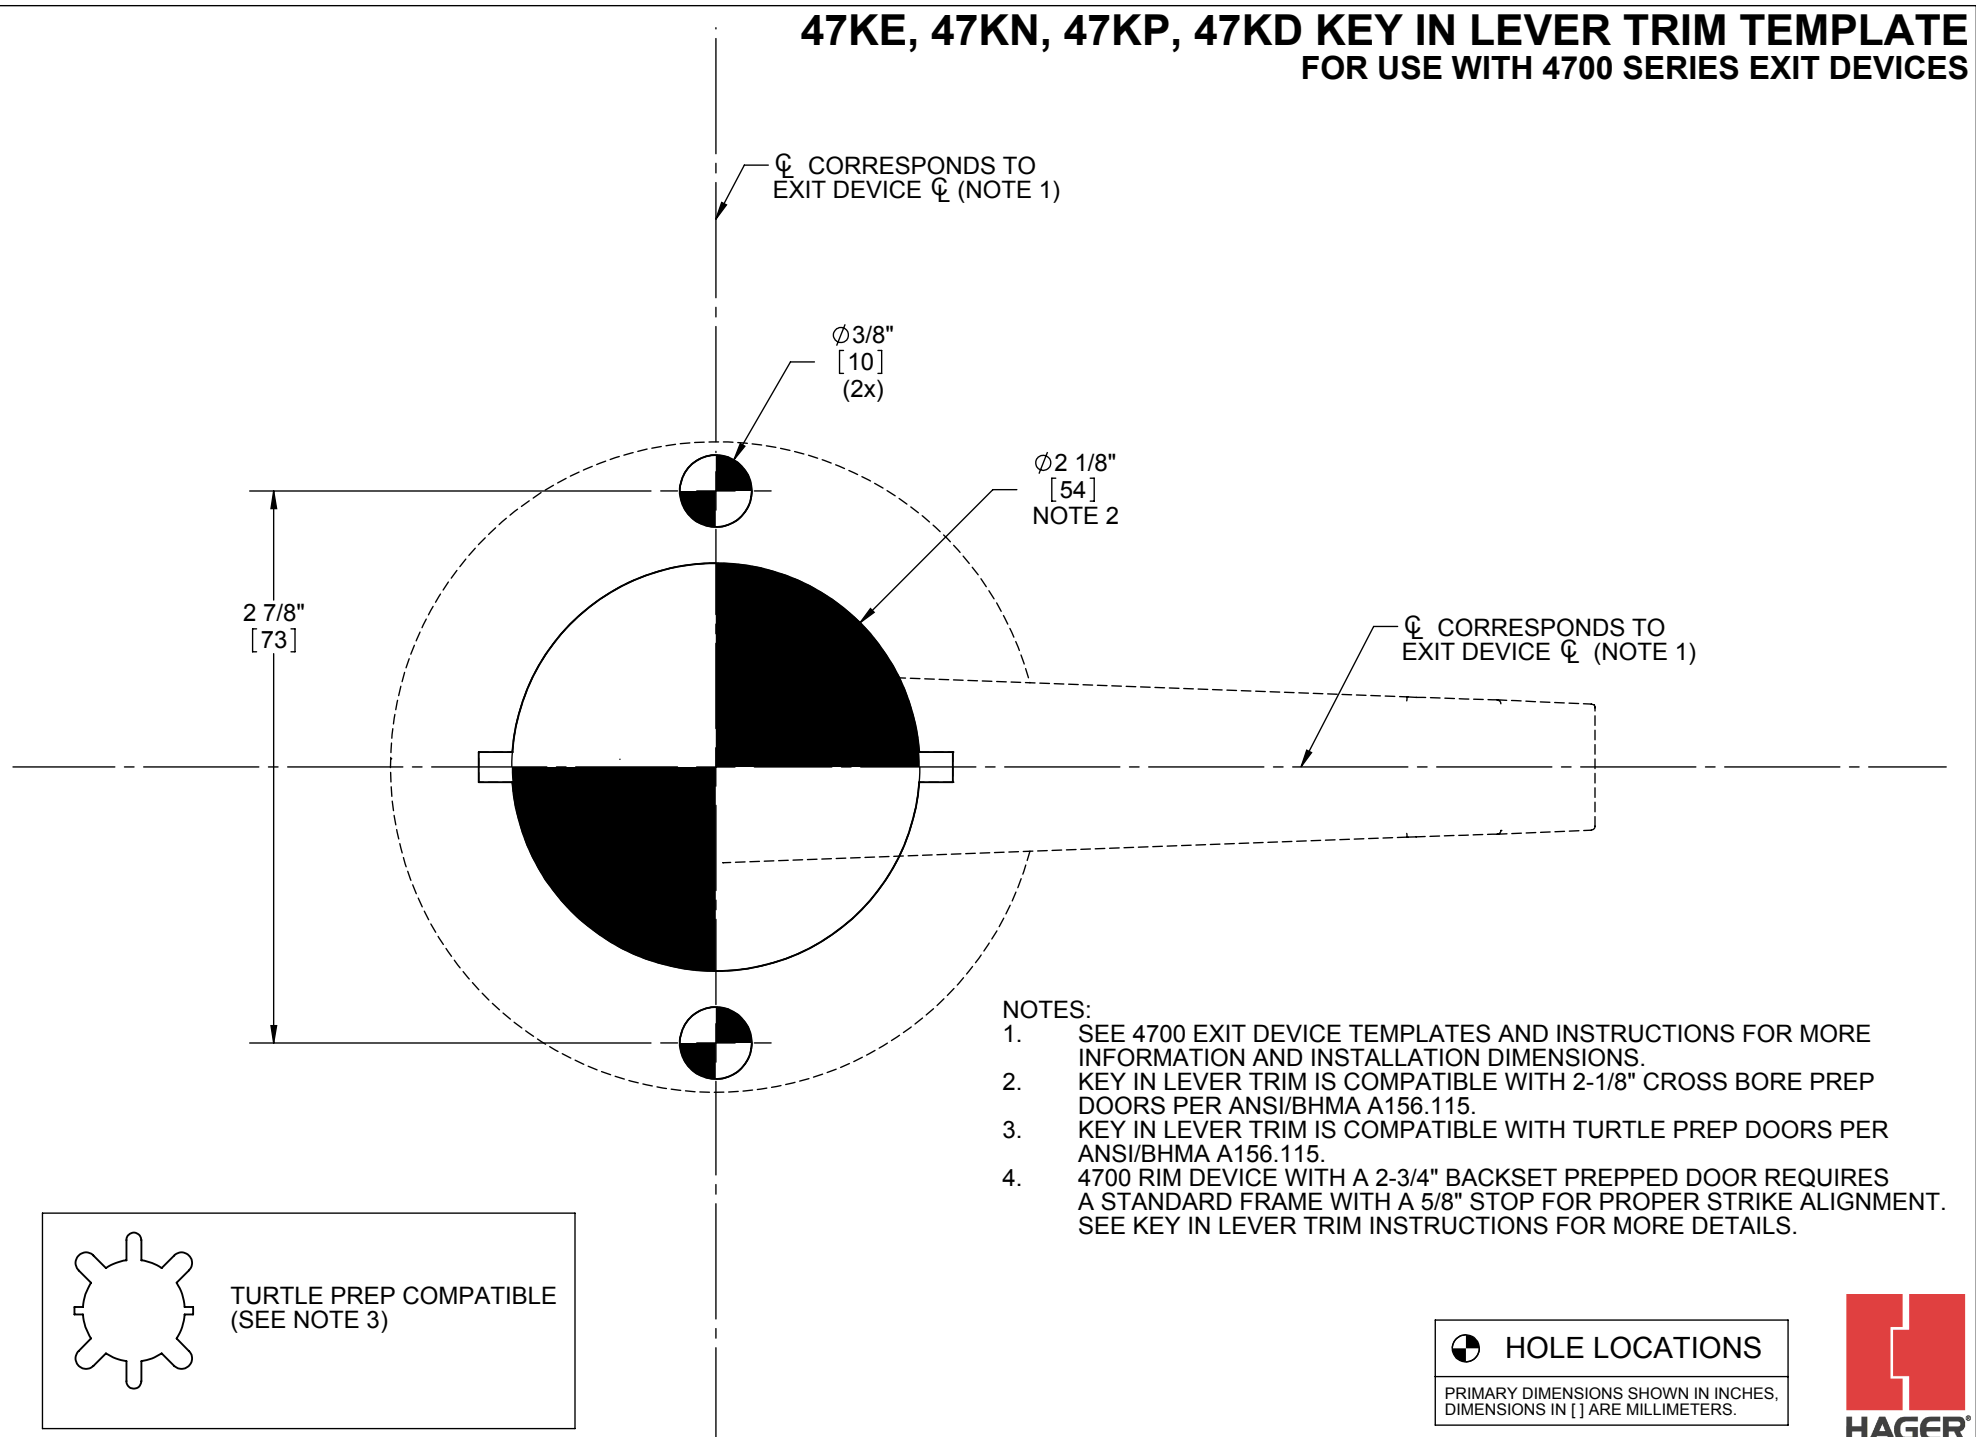

- NOTES:**
1. SEE 4700 EXIT DEVICE TEMPLATES AND INSTRUCTIONS FOR MORE INFORMATION AND INSTALLATION DIMENSIONS.
 2. KEY IN LEVER TRIM IS COMPATIBLE WITH 2-1/8" CROSS BORE PREP DOORS PER ANSI/BHMA A156.115.
 3. KEY IN LEVER TRIM IS COMPATIBLE WITH TURTLE PREP DOORS PER ANSI/BHMA A156.115.
 4. 4700 RIM DEVICE WITH A 2-3/4" BACKSET PREPPED DOOR REQUIRES A STANDARD FRAME WITH A 5/8" STOP FOR PROPER STRIKE ALIGNMENT. SEE KEY IN LEVER TRIM INSTRUCTIONS FOR MORE DETAILS.

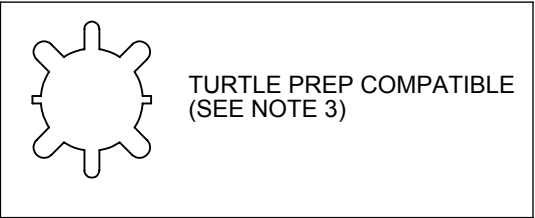

HOLE LOCATIONS

PRIMARY DIMENSIONS SHOWN IN INCHES,
DIMENSIONS IN [] ARE MILLIMETERS.

