


This application is intended for square edged doors only. For beveled edge doors, refer to the General Information section titled Door and Frame Dimensioning - Full Surface Models

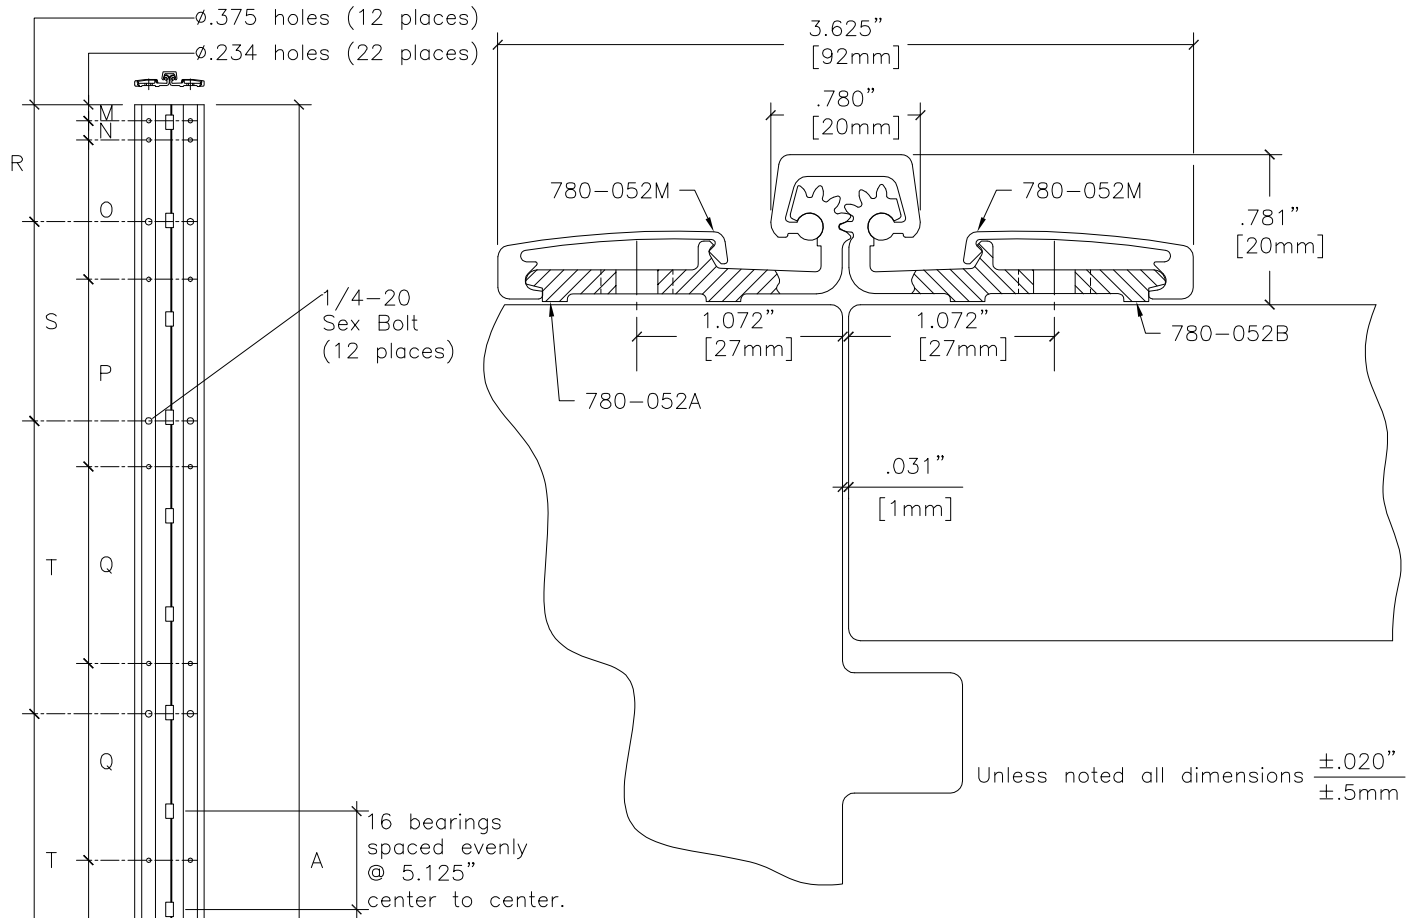


Vertical Hole Spacing

Non cumulative tolerances on hole to hole spacing.

	Metric (mm)	Decimal (in.)
A	1998.7 $\pm.000$	78.688 $\pm.000$
M	21.4 $\pm.020$	0.844 $\pm.008$
N	25.4 $\pm.020$	1.000 $\pm.008$
O	184.2 $\pm.020$	7.250 $\pm.008$
P	247.7 $\pm.020$	9.750 $\pm.008$
Q	260.1 $\pm.020$	10.250 $\pm.008$
R	209.5 $\pm.020$	8.246 $\pm.008$
S	263.5 $\pm.020$	10.375 $\pm.008$
T	387.4 $\pm.020$	15.250 $\pm.008$

OPTIONAL:
#12 Pan Head
Drill-kwik Screws



HAGER COMPANIES
HIGHWAY 78 WEST
P.O. BOX 3368
OXFORD, ALABAMA 36203

780-057 79" SD

DATE 01-15-02 REV. 08-19-02 DR. KBJ SCALE None

FILENAME z:\roton\template\standard\780-053.dwg

DRAWING NO. 780057079SD